

CSS-A10/A11

Access control relay box



- CSS-A10 / CSS-A11 relay box will be compatible with CSS-R11 access controller.
- Support door sensor detection, short or open.
- Built-in (Watch Dog)
- Support Wiegand input, exit button, door sensor, WG reader contacts
- CSS-A11 supports POE for easy installation.


Specifications

Model Name	CSS-A10
Power Requirement	DC9 ~ 24 V
Recommend Requirement	DC 12V 1A (Door lock excluded) DC 12V 2A (Door lock included)
Wiegand Range	Max 100M
Relay Power Requirement	Max DC30V 3A (Doesn't support AC POWER)
Dimension	105.05 x 71.75 x 28.3 mm
Weight	135 g

Model Name	CSS-A11(PoE Power supply)
PoE Standard	IEEE802.3af(15.4W)
PoE Received Pin	Support 1/2+、3/6- line pair (Mode A) 4/5+、7/8- line pair (Mode B)
PoE Distance	Max 100M
PoE Max. Output	DC 12V/1.2A
Protocol Standard	IEEE 802.3i ; IEEE 802.3u ; IEEE 802.3x Flow Control ; IEEE 802.3af DTE Power via MDI ; IEEE 802.3at DTE Power via MDI
Interface Protection	IEC61000-4-2(ESD)±15KV(air) , ±8KV(contanc) 8/20us 24A(12A)
Wiegand Range	Max 100M
Relay Power Requirement	Max DC30V 3A (Doesn't support AC POWER)
Dimension	105.05 x 71.75 x 28.3 mm
Weight	135 g

Structure

CSS-A10 Structure

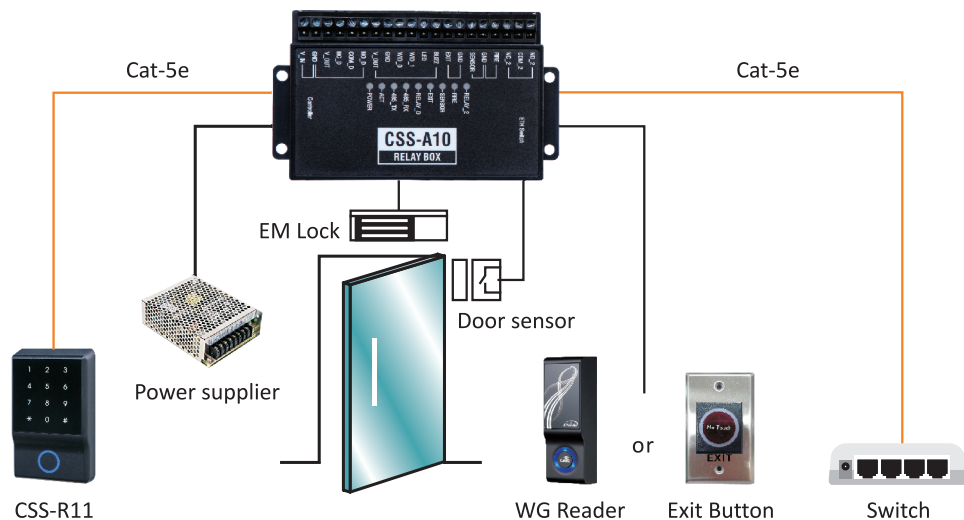

CSS-A11 Structure

