

CSS-A11

V1.0



INSTALLATION HW 1.0

A. Package Content

Controller x 1, installation guide x 1, Accessory kit x 1
 Accessory kit : screw x 4, screw anchors x 4, diode (1N4004) x 1

B. Specification

- PoE Standard: IEEE802.3af (15.4W)
- PoE Received Pin: Supports 1/2 +, 3/6-line pair (Mode A)
 4/5 +, 7/8-line pair (Mode B)
- PoE Distance: 100 meters
- PoE Maximum Output: DC 12V / 1.2A
- Protocol standard: IEEE 802.3i; IEEE 802.3u;
 IEEE 802.3x Flow Control;
 IEEE 802.3af DTE Power via MDI;
 IEEE 802.3at DTE Power via MDI
- Interface protection: IEC61000-4-2 (ESD) ± 15KV (air),
 ± 8KV (contanc) 8 / 20us 24A (12A)
- Wiegand range: Max 100M
- Relay supports Max 30VDC 3A (AC POWER does not support)

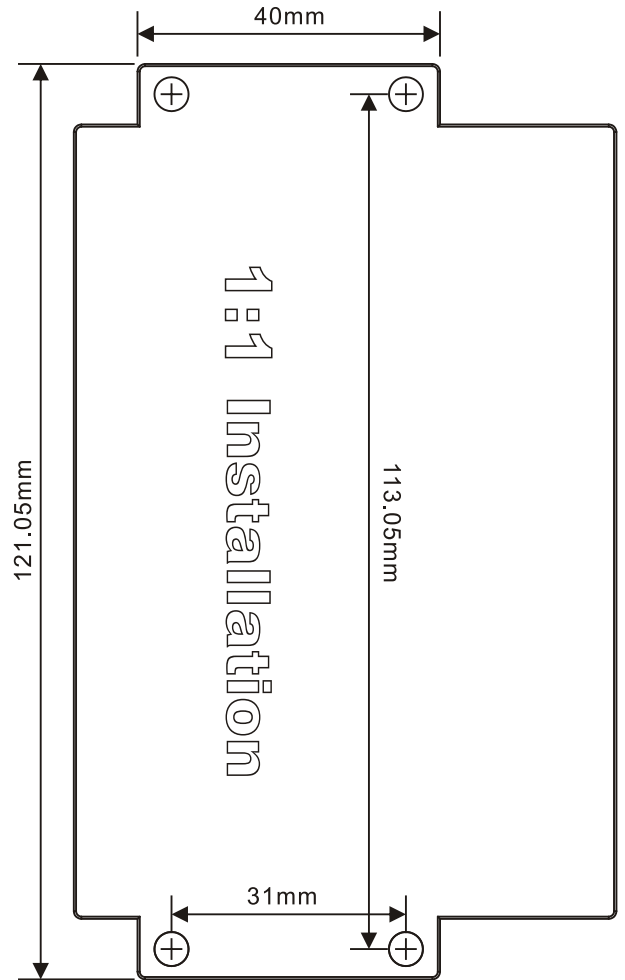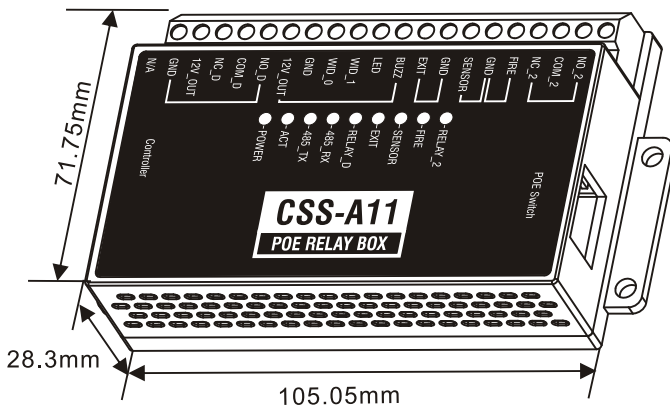

C. Description of the back side

Buzzer	Buzzer switch	<input type="checkbox"/> Enable (default) <input checked="" type="checkbox"/> ON	<input checked="" type="checkbox"/> Disable <input type="checkbox"/> OFF
Emergency	Emergency Mode	When the controller is offline, exit button still function without controller	<input type="checkbox"/> Enable (default) <input checked="" type="checkbox"/> ON <input checked="" type="checkbox"/> Disable <input type="checkbox"/> OFF
Sensor	Door sensor detection switch	<input type="checkbox"/> Enable (default) <input checked="" type="checkbox"/> ON	<input checked="" type="checkbox"/> Disable <input type="checkbox"/> OFF
N/A	Rerseve	<input type="checkbox"/> Enable (default) <input checked="" type="checkbox"/> ON	<input checked="" type="checkbox"/> Disable <input type="checkbox"/> OFF

